


Thermoplastic Mudguards Twin Wheel

Product Information

- Unique styling, advanced design
- Manufactured with high quality polyethylene, which gives increased product rigidity, whilst offering excellent impact and cold cracking resistance
- Lightweight
- Reflectors fitted within each mudguard (Material used ECE 104 compliant)
- The best visual and technical results are attained using the mudguard with the I-T bracket system. However conventional fixings can be used if required
- Resistant to most chemicals
- Available in black and over 60 fleet colours
- UV stability package on all mudguards

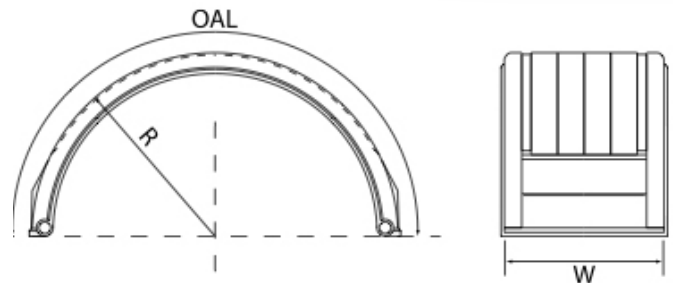

Part No.	Width	Radius (R)	Overall Length	Tyre sizes
IT420T	420mm (16½")	445mm (17½")	1450mm (57")	6.70R14, 6.70R15, 185R15, 6.00R16, 6.50R16, 175R16, 175/75R16
IT425	425mm (16¾")	410mm (16")	1290mm (50¾")	5.60R12, 155/70R12, 155R13, 155/70R13, 165R13, 175/70R13, 175R13, 185/70R13, 195/70R13, 6.70R13, 165R14, 165/75R14, 175R14, 175/75R14, 185R14, 185/75R14
IT475	475mm (17¾")	430mm (17")	1430mm (56")	195R14, 195/75R14, 205R14, 195R15, 205/70R15, 215R15, 185R16, 195/70R15, 185/75R16, 195R16, 195/75R16
IT480	480mm (19")	480mm (19")	1510mm (59½")	205/75R14, 205/65R15, 205/80R15, 7.00R15, 7.50R15, 7.00R16, 205R16, 215R16, 205/75R16, 7R16, 8R16, 7R17.5, 8R17.5
IT500T	500mm (19¾")	500mm (19¾")	1653mm (65")	215R14, 215/75R14, 225/70R15, 225/75R15, 215/75R16, 225/70R16, 7.50R16, 8.50R17.5, 205/75R17.5
IT530	530mm (21")	580mm (22¾")	1860mm (73")	9.00R16, 8.25R17, 9.50R19.5, 7.50R20, 8.25R20, 8R22.5, 9R22.5, 215/70R22.5, 215/75R22.5
IT530LP	530mm (21")	510mm (20")	1600mm (63")	8.25R15, 235/75R15, 225/75R16, 8.25R16, 9.5R17.5, 10R17.5, 215/75R17.5, 225/75R17.5, 235/75R17.5, 8R19.5, 9.00R19.5, 6.50R20, 7.00R20
IT570	570mm (22½")	600mm (23½")	1930mm (76")	9.00R20, 10R22.5, 10/70R22.5, 225/70R22.5, 255/70R22.5
IT580LP	580mm (22¾")	510mm (20")	1580mm (62¼")	255/75R15, 245/70R17.5, 245/75R17.5
IT610	610mm (24")	535mm (21")	1675mm (66")	10R15, 265/70R15, 265/70R17.5, 275/75R17.5, 245/70R19.5, 265/70R19.5
IT615	615mm (24¼")	635mm (25")	1995mm (78½")	11.00R16, 10.00R20, 11.00R22, 11R22.5, 275/80R22.5
IT650	650mm (25½")	650mm (25½")	2040mm (80¼")	11.00R20, 285/75R22.5
IT650LP	650mm (25½")	600mm (23½")	1905mm (75")	295/75R17.5, 10.5R20, 285/60R22.5, 11/70R22.5, 295/65R22.5, 275/70R22.5, 285/70R19.5
IT670	670mm (26½")	685mm (27")	2160mm (85")	12.00R20, 12R22.5, 11R24, 12.00R24, 11R24.5
IT690	700mm (27½")	620mm (24½")	1900mm (74¾")	305/70R19.5, 295/60R22.5, 285/70R22.5, 295/70R22.5, 305/60R22.5, 315/60R22.5
IT695	695mm (27½")	635mm (25")	2100mm (82¾")	12/80R22.5, 305/70R22.5, 295/80R22.5 Tractor Units
IT710	710mm (28")	650mm (25½")	1970mm (77½")	315/70R22.5, 13R22.5, 315/80R22.5, 305/75R24

8 Featherwing